




Technical Specification Sheet for BE6 Range of LED Luminaires

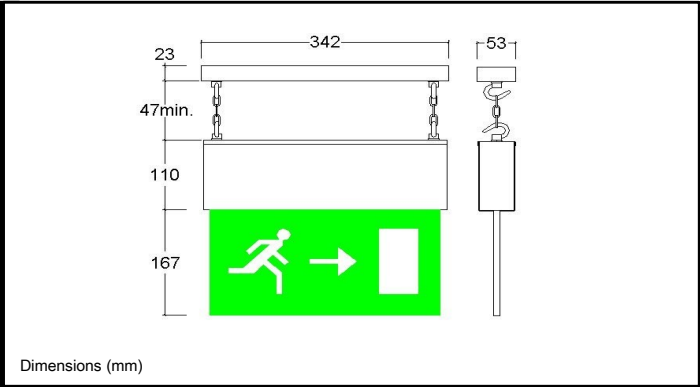

A hanging Exit Sign featuring BLE's Dual Circuit Technology control board making the unit suitable for both Non-Maintained and Maintained applications. Unit comes complete with a heavy duty polished Exit Legend blade offering an impressive 26 Metre viewing distance. Available in Maintained, Slave and Mains version. Available in either Brass, Chrome or White.

Product Specification					
Data	Self Contained Luminaire BE6LED8/M3/*	Slave/Mains Luminaire BE3/8/**/*			
		24	50	110	230
Input Voltage	230 Volt AC +/- 10% 50 Hz	24 Volt	50 Volt	110 Volt	230 Volt
Power Rating	5.5Watts	8.9VA	7.5VA	7.7VA	13VA
Light Source	15 x 5mm White LED's				
Light Output	114 Lumens	275 Lumens			
Emergency Duration	3 Hours	Not Applicable			
Battery Type	2.4 Volt 4 Ah Nickle Cadmium Constant current charge				
Charger	250mA with Green LED Indicator				
Recharge Time	24 Hours (14 Hours for 1 hour Duration)				
Auto Test	Yes (optional)				
Legend Kit	N/A				
Recessing Kit	N/A				
Dimensions	342mm x 53mm x 347mm (min)				
Weight	2.6 Kgs	2.1 Kgs			

BLE holds ISO 9000 accreditation for the appropriate categories of emergency lighting supplied by the Company. All luminaires that BLE supplies to the European Market are designed to comply with all of the requirements of BS EN 60598-2-22.

Recommended Routine Inspection	
Daily	Check the LED is illuminated.
Monthly	Check that the Luminaire operates in the emergency mode for up to 15 minutes.
6 Monthly	Check that the Luminaire operates in the emergency mode for 1/3 of its rated duration.
Yearly	Check that the Luminaire operates in the emergency mode for its full rated duration
General	If the Luminaire fails the required duration replace the battery with an identical type.